



## Metalbilt® Clearspan Shutters

---

### Applications


Shop fronts, bar tops, counter tops, pedestrian openings, arcades or anywhere that clean lines and visibility are desired.

### Features

- Curtains are constructed from extruded polycarbonate slats that allows viewing of your merchandise day and night
- High visibility along with dust free and vermin proof protection
- Operation by spring balance or motorised
- Fixed or removable mullions options are available
- An extensive range of powder coating colours can be offered
- Grilles are custom made to fit the size of opening and structure of building
- Sales Asia Oceania wide
- Branches in Auckland, Wellington and Christchurch


*55 years of manufacturing experience and continuous refinement.  
Service and repairs, 24 hours a day, on all makes of commercial doors.*

# Metalbilt® Clearspan Shutters – Specifications

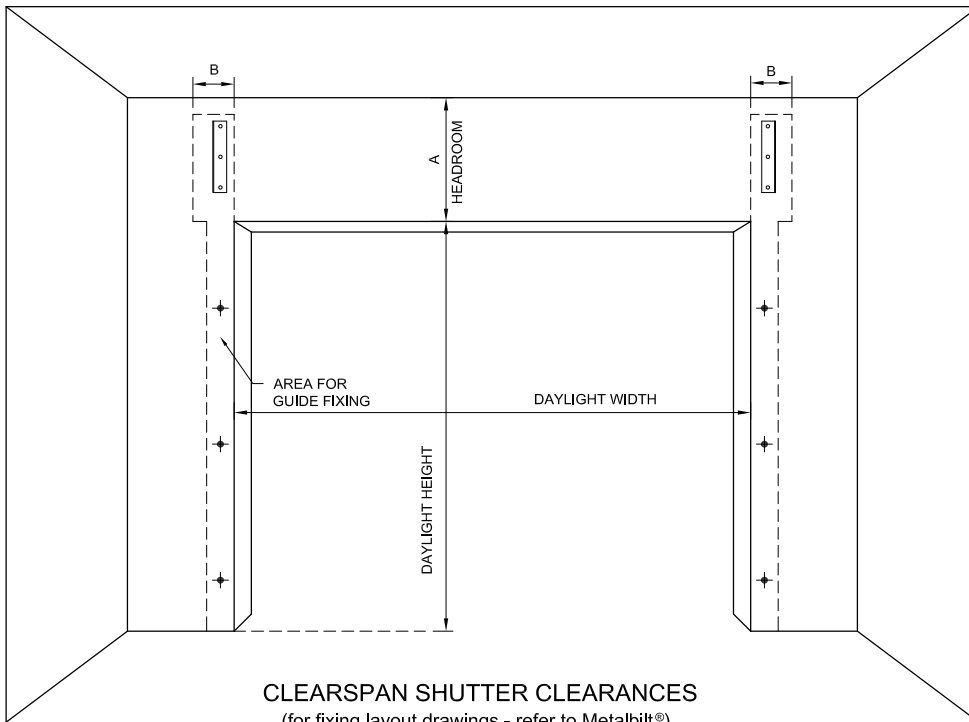



HEIGHT OF OPENING	HEADROOM	SIDEROOM	INSIDE PROJECTION BARREL	INSIDE PROJECTION MOTOR	GUIDE PACKER SIZE
(m)	A	B	C	D	E
0 - 1.25	350	120	300	550	0
1.25 - 2.0	370	120	330	580	0
2.0 - 3.0	390	120	360	600	40
3.0 - 4.0*	420	120	390	615	50

\* Maximum Spring Balance Size = 3.5m High x 4.0m Wide  
Maximum Motorised Size = 4.0m High x 5.0m Wide

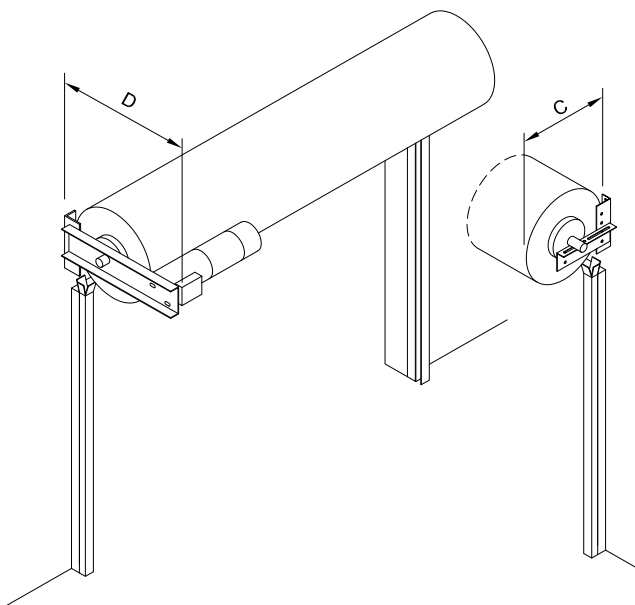

## GUIDE DETAILS

Packer by others (to lintel only)



## CURTAIN

Clear polycarbonate slats joined with extruded aluminium rails at 100mm nominal pitch. Each rail is fitted with a nylon end lock to control lateral movement. The slats can be replaced individually if damaged. Fitted to the lower edge of the curtain is an extruded aluminium bottom bar.

## GUIDES

Specially extruded aluminium channel 40mm x 30mm. Guides screwed to jambs at max. 600mm centres. Each guide is constructed with a bell mouth to facilitate smooth entry of the curtain.

## FINISH

Clear anodised or powder coated.

## BARREL

Barrels are fabricated from mild steel tube with a minimum diameter of 165mm and of sufficient wall thickness to ensure that nominal deflection does not exceed safe working conditions. Helically wound counterbalance springs are contained within the barrel.

## SECURITY

Flush mounted lock with various keying options.

## OPERATION

Spring balanced or motorised. Motorised shutters have single phase motorsets with adjustable limit switches and control pendant. Operating speed is approximately 200mm per second. The motorsets incorporate an automatically engaging handchain for use during power failures. Battery backup systems are available.

Key switches and door controllers to accept signals from a range of activation features are also available. Special motorising options and barrel mounting methods are available on request.

Standard doors meet the 5 year durability requirements of the N.Z.B.C. Details available on request.

We reserve the right to alter specification without notice and without incurring obligation.

Contact details of your nearest Metalbilt® representative.

**Auckland**  
Postal Address  
PO Box 71169 Rosebank  
Auckland 1348 New Zealand  
Street Address  
26 Timothy Place Avondale  
Auckland 1026 New Zealand  
Phone 09 828 1167  
Fax 09 828 6358  
Email mbilt.auck@metalbilt.co.nz

**Christchurch**  
Postal Address  
PO Box 6033 Upper Riccarton  
Christchurch 8442 New Zealand  
Street Address  
25 Baigent Way Middleton  
Christchurch 8024 New Zealand  
Phone 03 338 2600  
Fax 03 338 4386  
Email mbilt.chch@metalbilt.co.nz

**Wellington**  
Postal Address  
PO Box 38933 Wellington Mail Centre  
Lower Hutt 5045 New Zealand  
Street Address  
33 Marsden Street Melling  
Lower Hutt 5010 New Zealand  
Phone 04 568 2933  
Fax 04 568 7337  
Email mbilt.well@metalbilt.co.nz



[www.metalbilt.co.nz](http://www.metalbilt.co.nz)

**NORFOLK**  
INTEGRATED ENGINEERING